

- [PRODUCTS](#)   [NEWS](#)   [COMPANY PROFILE](#)   [CONTACT US](#)   [SITE MAP](#)  
[WINCHES](#)   [POWER DRIVES](#)   [MOUNT SYSTEMS](#)   [PREMIUM HUBS](#)   [ACCESSORIES](#)  
[ATVS](#)   [SUPERMOUNT](#)   [JEEP](#)



POWER WHEN YOU NEED IT, WHERE YOU

[HOME](#)

**H8P/H10P**  
 8,000 –10,000 lb./  
 3,630–4,540 kg

Additional winch part numbers are listed in the [master product guide](#).



**All AC Winches**

- [AC1000](#)
- [AC1500](#)
- [AC2000](#)
- [AC3000](#)
- [SAC1000](#)

**All DC Winches**

- [EP12.5](#)
- [EP16.5](#)
- [Husky 8](#)
- [Husky 10](#)
- [EP6.0](#)
- [EP9.0](#)
- [EPi6.0](#)
- [EPi9.0](#)
- [X6CD](#)
- [X9](#)
- [S6000](#)
- [S9000](#)
- [S3000](#)
- [S4000](#)
- [S5000](#)
- [ATV1800](#)
- [ATV2300](#)
- [ATV3000](#)
- [GP1800](#)
- [GP2300](#)
- [GP3000](#)
- [EX1](#)
- [X1](#)
- [X1F](#)
- [X2](#)
- [X2F](#)
- [T1500](#)
- [T2000](#)
- [C1000](#)

**Hydraulic Winches**

- [H9W](#)
- [H10/H12/H14](#)
- [H8/10P](#)
- [H11/13/15P](#)
- [H20/25/30P](#)

**Power Drives**

**Standard Features**

- Proven robust construction engineered to meet J706 standards
- High efficiency 2 stage planetary gearbox giving optimum reliability
- Integral, automatic, fail safe brake
- Rugged, high torque motor unit of proven reliability
- Spring engaged, manual freespooling, released for rapid rope payout, pneumatic option also available, adjustable Freespool Damper
- Heavy duty fabricated steel mounted on maintenance-free plain bearings

**Performance**

<b>H8P</b>	
Maximum Oil Pressure	1,800 psi
Maximum Oil Flow	15gpm (57 l/min.)
Line Pull (Second Layer)	6,658 lbs. (3,020kg)
Line Pull (Third Layer)	5,710 lbs. (2,590kg)
Line Pull (Fourth Layer)	4,892 lbs. (2,260kg)
<b>H10P</b>	
Maximum Oil Pressure	1,700 psi
Maximum Oil Flow	15gpm (57 l/min.)
Line Pull (Second Layer)	8,200 lbs. (3,720kg)
Line Pull (Third Layer)	6,970 lbs. (3,160kg)
Line Pull (Fourth Layer)	6,040 lbs. (2,740kg)

**Specifications**

<b>H8P</b>	
Rated Line Pull (Bottom Layer)	8,000 lb. (3,630 kg)
Line Speed, Bottom Layer, No Load	40'/min. (12.19m/min.)
Recommended Wire Rope Diameter	3/8" (10mm)
Short Drum Wire Rope Length	100' (30m)
Long Drum Wire Rope Length	130' (40m)
Drum Diameter	3.5" (89mm)
Weight (Excluding Wire Rope)	84 lbs. (38/40 kg)
<b>H10P</b>	
Rated Line Pull (Bottom Layer)	10,000 lb. (4,540 kg)
Line Speed, Bottom Layer, No Load	30'/min. (9.14m/min.)
Recommended Wire Rope Diameter	7/16" (11mm)
Short Drum Wire Rope Length	75' (23m)
Long Drum Wire Rope Length	100' (30m)
Drum Diameter	3.5" (89mm)

[AC](#)  
[DC](#)

Weight (Excluding Wire Rope)

84 lbs. (38 kg)


**Winch**

H8P Winch only (Short Drum)	5050A
H8P Winch only (Long Drum)	5060A
H10P Winch only (Short Drum)	5170A
H10P Winch only (Long Drum)	5178A

**Optional Accessories**


Roller Fairlead (Short Drum)	5600
Roller Fairlead (Long Drum)	5610A
Cable Tensioner(Short Drum)	5606
Cable Tensioner (Long Drum)	5607
Flat-Bed Mount Plate	5625
Pneumatic Freespool	5603
Pulley Block, 20,000 lb. (9,100kg)	7750A

**Dimensions**



ALL HOLES  
M10 THREAD

**commended Accesso**

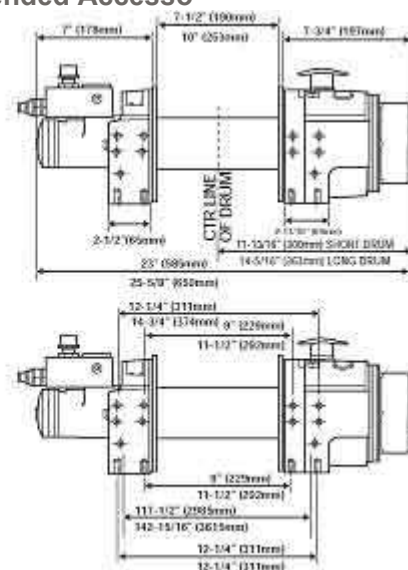

[Home](#) | [Winches](#) | [Power Drives](#) | [Mounts for ATVs](#) | [Mounts for Vehicles](#) | [Jeeps](#) | [Hubs](#) | [Accessories](#) | [News](#) | [Company Profile](#) | [Contact Us](#) | [Site Map](#)

© Copyright 2006 Superwinch, Inc. All Rights Reserved.